


Technical specifications

Dimensions - Air suspension vehicles

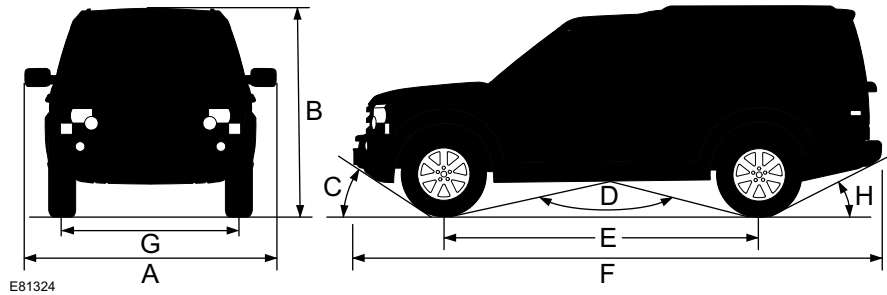

E81324

Ref.	Dimension	Metric	Imperial
A	Overall width	2 191 mm	86.26 in.
	Overall width (mirrors folded)	2 009 mm	79.09 in.
B	Overall height		
	- Access height	1 837 mm	72.32 in.
	- Standard height	1 887 mm	74.29 in.
	- Off-road height	1 942 mm	76.46 in.
C	Approach angle (at EEC kerb weight and off-road height)	37.2°	
D	Ramp breakover angle (at EEC kerb weight and off-road height)	124.2°	
E	Wheelbase	2 885 mm	113.6 in.
F	Overall length	4 848 mm	190.9 in.
	Overall length (including tow hitch - to centre of tow ball)	4 913 mm	193.4 in.
G	Track:		
	- Front	1 605 mm	63.2 in.
	- Rear	1 612.5 mm	63.5 in.
H	Departure angle without tow hitch (at EEC kerb weight and off-road height)	29.6°	
	Departure angle with tow hitch (at EEC kerb weight):		
	- Standard ride height	15.7°	
	- Off -road ride height	18.5°	

Technical specifications

Ref.	Dimension	Metric	Imperial
	Wading depth		
	- Standard height	600 mm	24 in.
	- Off-road height	700 mm	28 in.
	Minimum ground clearance (off-road height)	240 mm	9.44 in.
	Maximum gradient, nose up/down		
	- Continuous operation	35°	
	- Drive-through	45°	
	Turning circle	11.45 metres	37.56 ft
	Wheel alignment (Total)		
	- Front	-0.16° ±0.2°	-10' ± 12'
	- Rear	0.16° ±0.2°	10' ± 12'
	Brake pedal free travel	Not adjustable	
	Clutch pedal free travel	Not adjustable	