

Instrument Panel and Console - Floor Console Upper Panel


Removal and Installation

Removal


1. Remove the ride and handling optimization switch assembly.

For additional information, refer to: [Ride and Handling Optimization Switch](#) (204-06 Ride and Handling Optimization, Removal and Installation).


2. Remove both cup holder inserts.

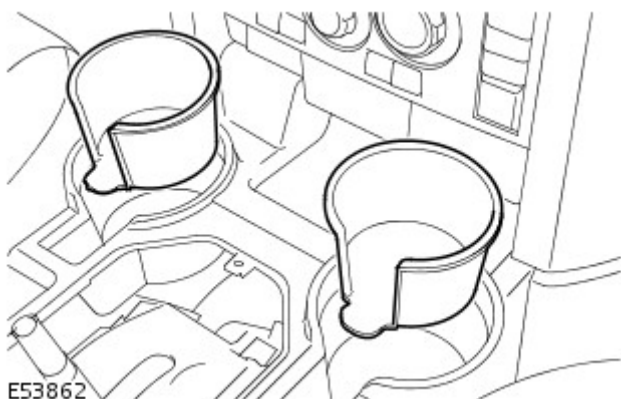


3. Remove the floor console liner.

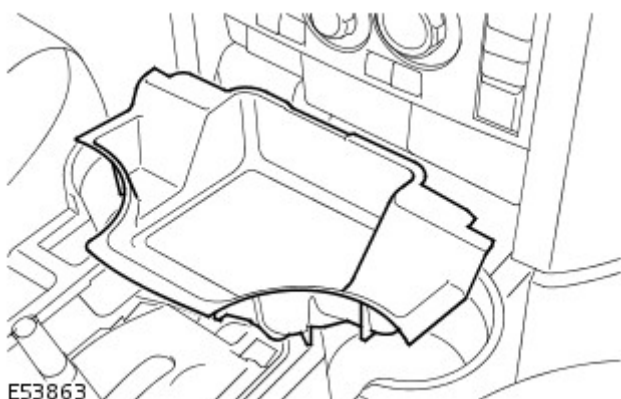

4. Remove the parking brake switch.
 - Remove the plastic insert.
 - Remove the screw.
 - Disconnect the electrical connector.

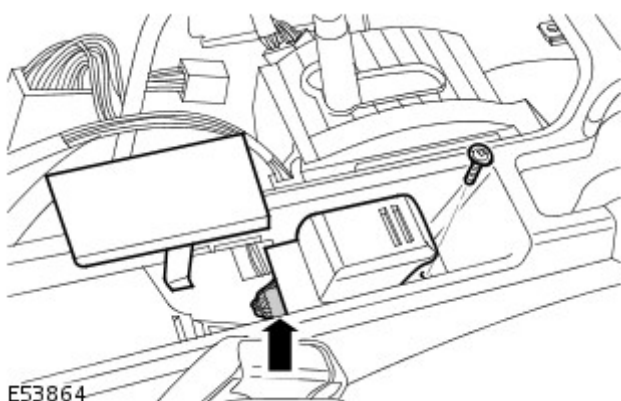

5. Remove the floor console upper panel.
 - Open the cubby box lid.
 - Remove the rubber insert.
 - Remove the plastic insert.
 - Remove the screw.
 - Release the 8 clips.

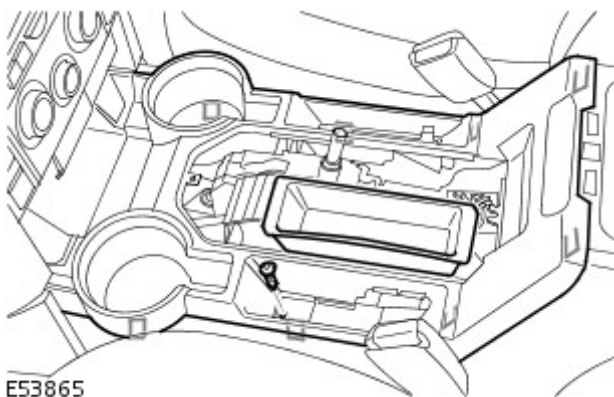

Installation

1. Install the floor console upper panel.
 - Tighten the screw.
 - Install the rubber insert.
 - Install the plastic insert.
2. Install the parking brake switch.
 - Connect the electrical connector.
 - Install the screw.
 - Install the plastic insert.
3. Install the floor console liner.
4. Install both cup holder inserts.
5. Install the ride and handling optimization switch assembly.
For additional information, refer to: [Ride and Handling Optimization Switch](#) (204-06 Ride and Handling Optimization, Removal and Installation).