

Removing and installing rear side panel trim, Transporter



Note

Removal and installation is described for the right-hand side of the vehicle with sliding door. Apply the same instructions for removal and installation on the right-hand side of the vehicle without sliding door and for the left-hand side of the vehicle with or without sliding door as appropriate.

Removing


- Remove belt end fitting of seat belt for outer seat in 2nd row:
 - ◆ Shuttle → [Chapter](#).
 - ◆ Kombi → [Chapter](#).
- Remove belt end fitting from belt of outer seat in 3rd seat row → [Chapter](#).
- Remove upper C-pillar trim → [Chapter](#).
- Remove upper D-pillar trim → [Chapter](#).
- Detach side panel trim -1- from retainers and remove it from vehicle.

Installing



Note

- ◆ *Before installing, check retaining clips -2- for damage and renew as necessary.*
- ◆ *After installing, check that the trim is located completely in the door seal bead and in the rear lid seal bead.*
- Install in reverse order of removal.

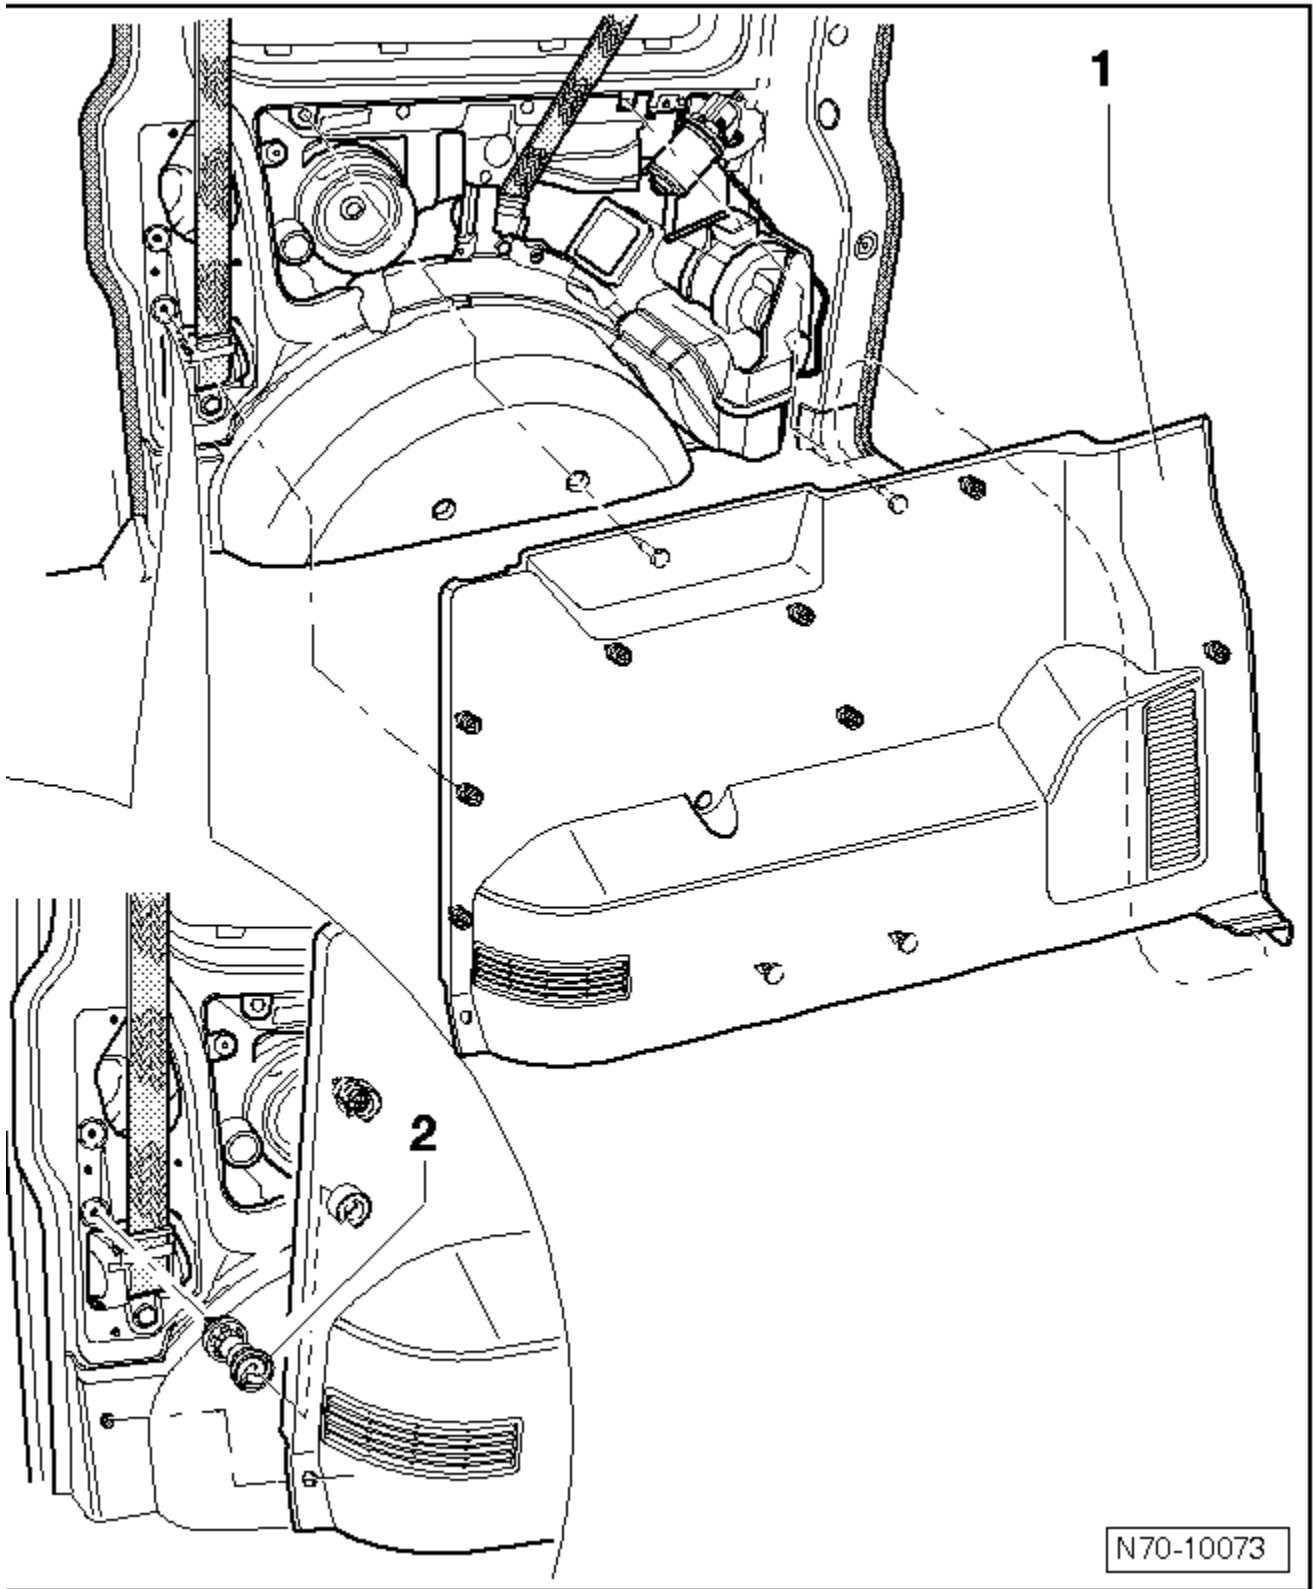

N70-10073